

System sheet PU-BCB Plus

Description


Tough-elastic anti-slip flooring system based on polyurethane with a wear resistant topcoat.

Application area's

- Parking garages
- Carwashes

Most important properties

- Anti-slip ($\pm R11 / 12$)
- Tough-elastic
- Seamless
- Waterproof
- Soundproofing

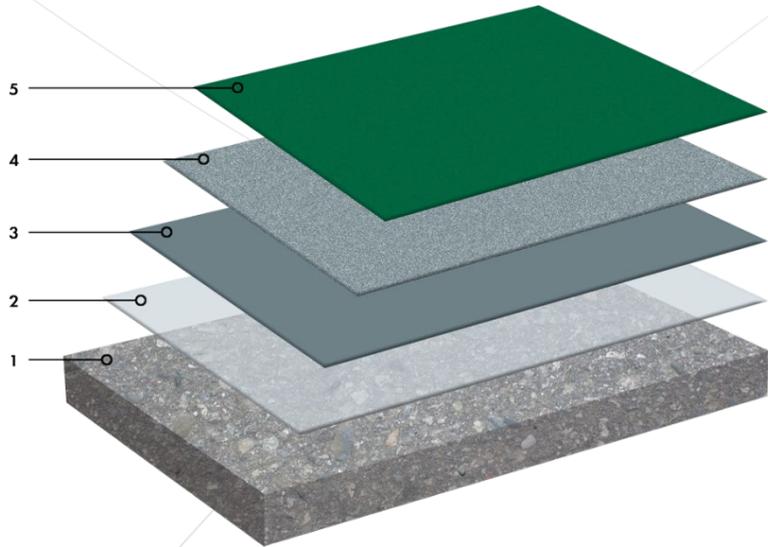

1. Pre-treat surface correctly
2. Rocapox Resin 100 ($\pm 0,30 \text{ kg/m}^2/\text{layer}$)
3. Rocathaan Screed ($\pm 1 \text{ kg/m}^2/\text{layer}$)
4. Rocathaan PU-300 BA, grey coloured ($\pm 1,2 \text{ kg/m}^2/\text{layer}$) and fully scatter wet layer immediately with fire dried quartz sand 0,7 - 1,2 mm ($\pm 6 \text{ kg/m}^2/\text{layer}$)
5. Rocathaan Topcoat UP2 ($\pm 0,35 \text{ kg/m}^2/\text{layer}$)
Apply two layers

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21
www.prokol.nl • info@prokol.nl

Liquid synthetic materials for a sustainable future